
Bronkhorst®

doc.nr.: 9.16.366A
date: 26-10-2026

PROFIBUS DP

Hook-up diagram
CORI-FLOW
M15 MKII

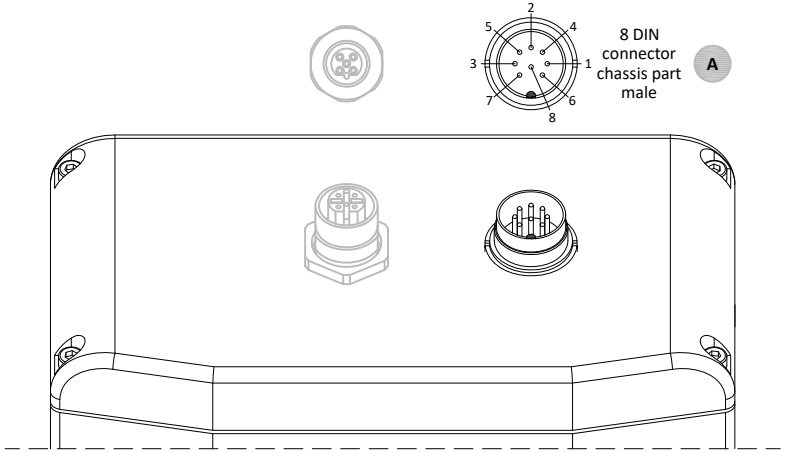

8 DIN connector chassis part male

A


POWER connection

A

1	Do not connect
2	Do not connect
3	Do not connect
4	0V power
5	Do not connect
6	Do not connect
7	+Us
8	Do not connect
housing	Shield

8 DIN connector cable part female

Supply 24Vdc

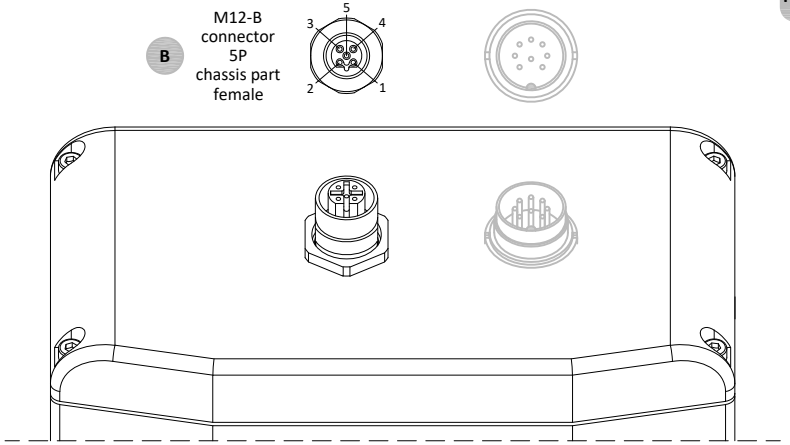

B

M12-B connector 5P chassis part female

PROFIBUS DP connection

B

1	+5V out ⓘ
2	Data A
3	Data GND ⓘ
4	Data B
5	Do not connect
housing	

M12-B connector 5P cable part male

ⓘ Signals are for termination purpose only.

For reliable measurements, it is important to reduce interference from outside noise on the signals.

- When connecting to other devices, ensure that the integrity of the shielding is maintained.
- Use shielded cables and wire terminals.