
Bronkhorst®


doc.nr.: 9.16.368A
date: 26-10-2026

IO configurations A/B
PIN 5 8 DIN Hook-up diagrams


Hook-up diagram
CORI-FLOW
M15 MKII

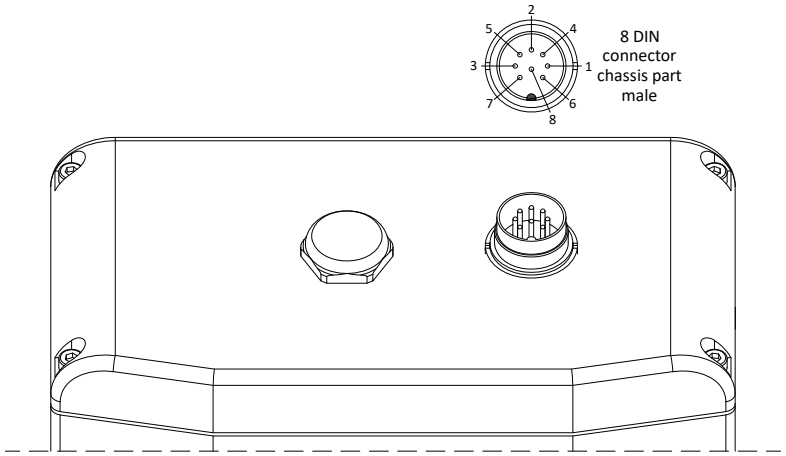

Analog Output:
Voltage (A-#-#)

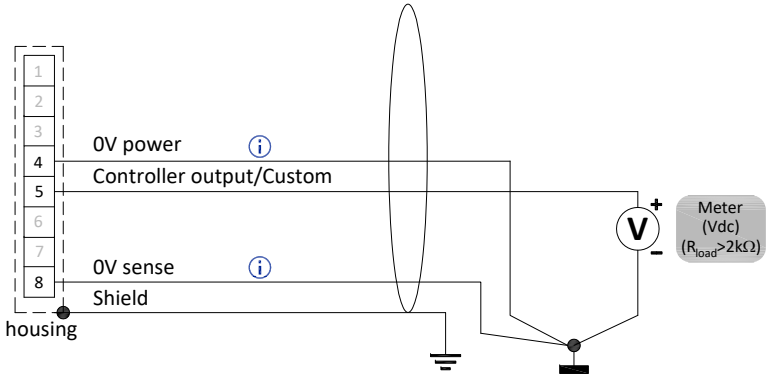

Analog Output:
Current (B-#-#)

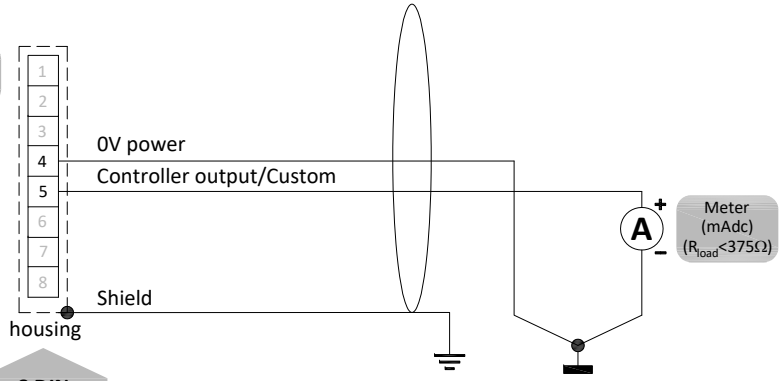

8 DIN connector cable part female

0V power (PIN 4) and 0V sense (PIN 8) should be seperately connected to the 0Vdc terminal at the power supply for long cable compensation.
Connect the remaining pins according to the applicable wiring diagram.

For reliable measurements, it is important to reduce interference from outside noise on the signals.

- When connecting to other devices, ensure that the integrity of the shielding is maintained.
- Use shielded cables and wire terminals.