

Bronkhorst®

doc.nr.: 9.16.369A
date: 26-10-2026

IO configurations C/D/E/F
PIN 5 8 DIN Hook-up diagrams

Hook-up diagram
CORI-FLOW
M15 MKII

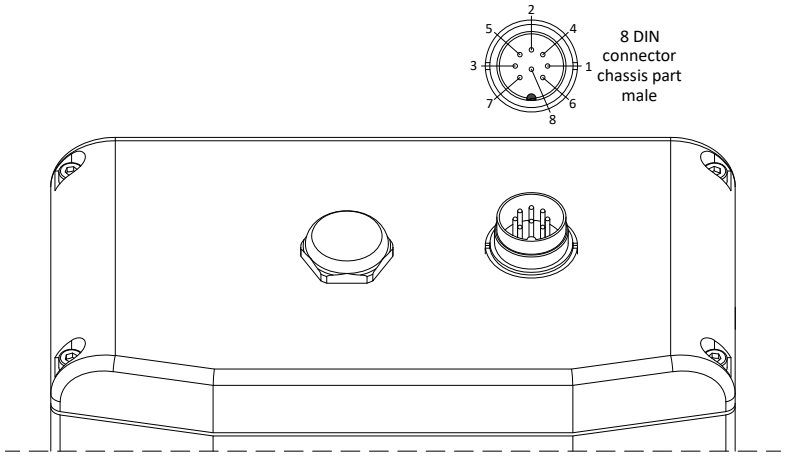

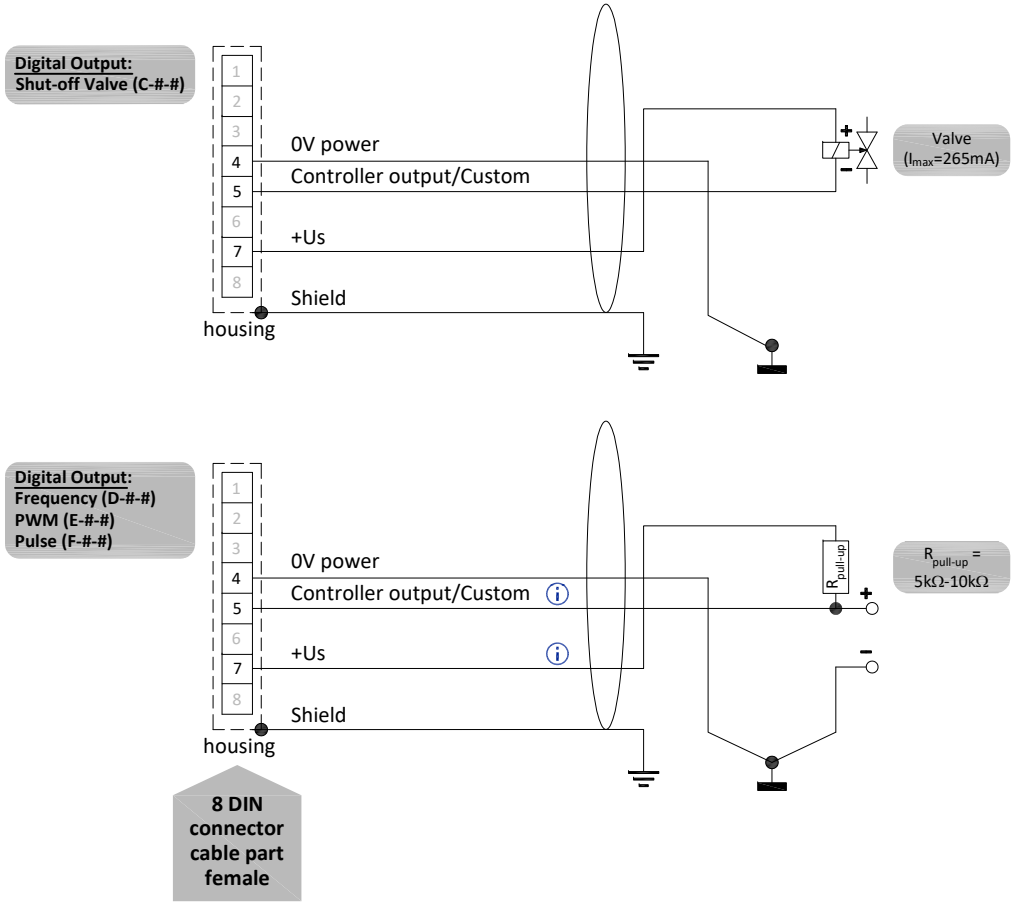

Use Rpull-up (between 5kΩ and 10 kΩ) to create 15-24Vdc at PIN 5.
Pulse output - Active (low) = 0Vdc.
Connect the remaining pins according to the applicable wiring diagram.

For reliable measurements, it is important to reduce interference from outside noise on the signals.

- When connecting to other devices, ensure that the integrity of the shielding is maintained.
- Use shielded cables and wire terminals.