

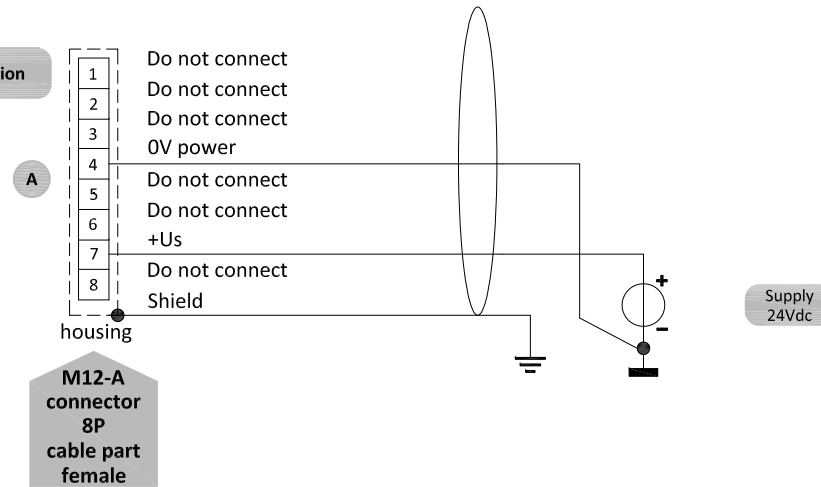
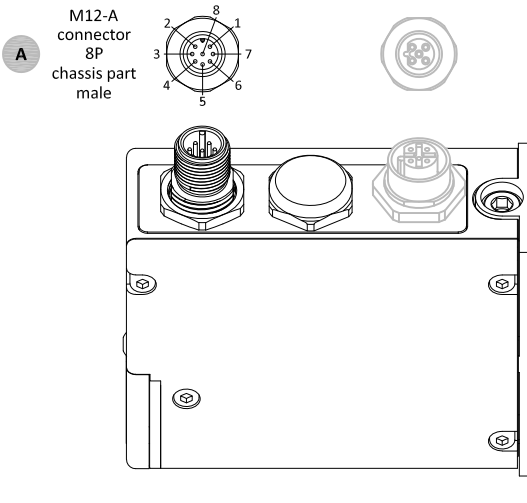


POWER connection

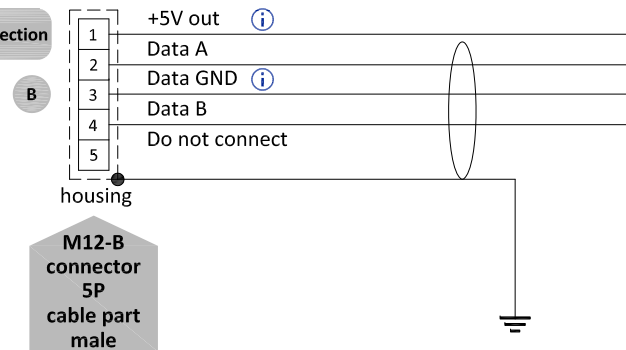

PROFIBUS DP connection

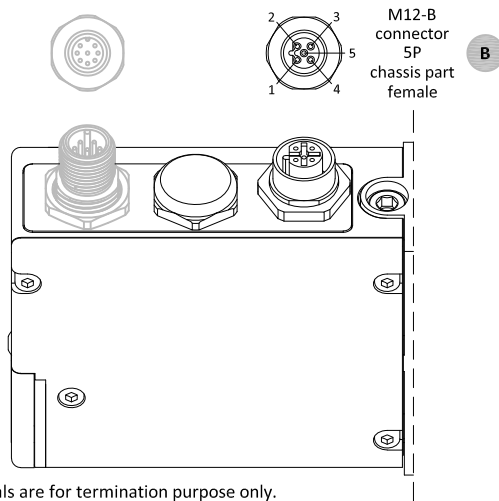

i Signals are for termination purpose only.

! For reliable measurements, it is important to reduce interference from outside noise on the signals.

- When connecting to other devices, ensure that the integrity of the shielding is maintained.
- Use shielded cables and wire terminals.